

184-pin PC3200 DDR- SDRAM Module

DIMM 512MB DDR-I in TSOP Technique

Features:

- 184-pin 64-bit Dual-In-Line Memory Module. Double Date Rate synchronous DRAM Modules for desktop applications.
- DDR- SDRAM component base: 32M8 Infineon or Micron
- V_{DD} 2,6 ±0.2V, V_{DDQ} 2,6 ±0.2V
- Programmable CAS Latency, Burst Length and Wrap Sequence
- Auto Refresh (CBR) and Self Refresh
- 8k Refresh every 64ms
- 2.6 I/O (SSTL_2 compatible)
- Serial Presence Detect with EEPROM
- Gold-contact pad
- This module family is fully pin and functional compatible to the JEDEC PC3200 spec. and JEDEC- Standard MO 206 (refer to www.jedec.org)

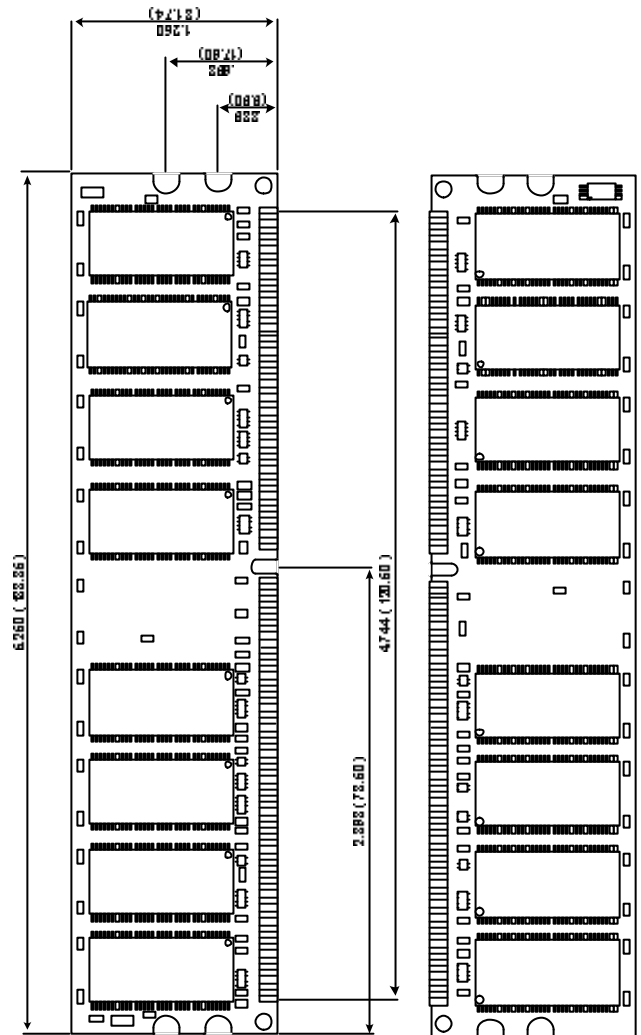


Figure 1: Mechanical Dimensions

Table 1: Order Information / Addressing

Organization	Banks	JEDEC Code	Addressing	Chip code	Swissbit Code
64M x 64 / 16x32x8	2	512MB PC3200S-333	13 / 2 / 10	MT46V32M8TG-5T	SDU06464H1B32MT-50
64M x 64 / 16x32x8	2	512MB PC3200S-333	13 / 2 / 10	HYB25D256800BT-5	SDU06464H1B22IN-50

Table 2: Operating Current ($T_A = 0$ to 70°C ; $V_{DD} = 2.5\text{V} \pm 0.2\text{V}$, $V_{DDQ} = 2.5\text{V} \pm 0.2\text{V}$)

Parameter	Symbol	MT-50	IN-50	Unit
Operating Current	max. I_{DD0}	1112	1080	mA
Precharge Standby Current (Power Down Mode)	max. I_{DD2P}	64	112	mA


Table 3: AC Characteristics ($T_A = 0$ to 70°C ; $V_{SS} = 0\text{V}$; $V_{DD} = 2.5\text{V} \pm 0.2\text{V}$, $V_{DDQ} = 2.5\text{V} \pm 0.2\text{V}$)

Parameter	Symbol	MT-50		IN-50		Unit
		min.	max.	min.	max.	
Clock Cycle Time	t_{CK}	6.0	13	6.0	13	ns
		5.0	7.5	5.0	7.5	
Access Time from Clock	t_{AC}	-0.70	+0.70	-0.70	+0.70	ns
Row to Column Delay Time	t_{RCD}	15	-	15	-	ns
Row Precharge Time	t_{RP}	15	-	15	-	ns

Table 4: Environmental Requirements

Operating Temperature	0°C to + 70°C ambient
Operating Humidity	10% to 90% relative humidity, noncondensing
Operating Pressure	10106 PSI (up to 10000 ft.)
Storage Temperature	-40°C to 70°C
Storage Humidity	5% to 95% without condensing
Storage Pressure	1682 PSI (up to 5000 ft.) at 50°C

Part Number Code

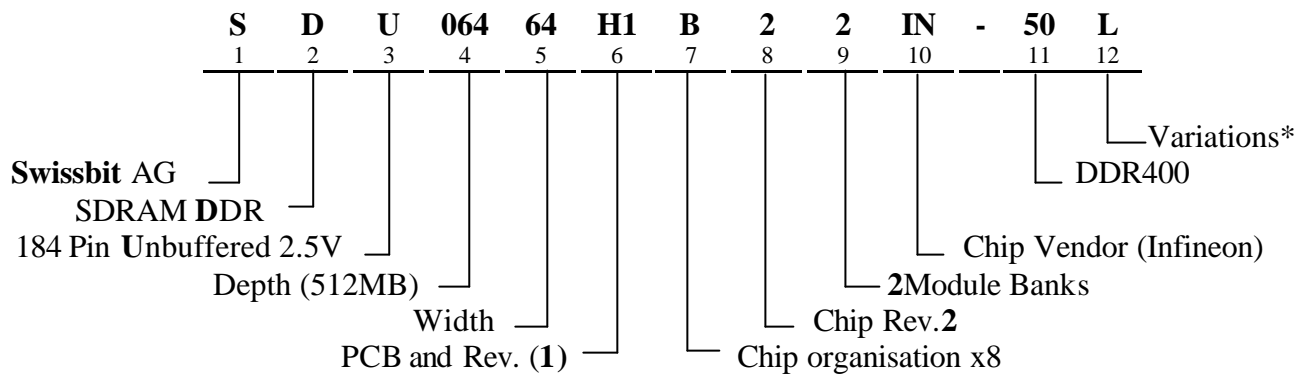

* optional / additional information

Swissbit Group Adresses:

Swissbit AG
Industriestrasse 4 – 8
CH – 9552 Bronschhofen
Switzerland

Phone: +41 (0)71 913 72 66
Fax: +41 (0)71 913 74 50

Swissbit Germany GmbH
Wolfener Strasse 36
D – 12681 Berlin
Germany

Phone: +49 (0)30 93 69 54 – 0
Fax: +49 (0)30 93 69 54 – 55

Swissbit NA, Inc.
18 Willett Avenue, Suite 203
Port Chester, NY 10573
USA

Phone: +1 914 935 1400
Fax: +1 914 935 9865

Swissbit NA, Inc.
7801 North Lamar Boulevard, Suite E – 186
Austin, TX 78752
USA

Phone: +1 512 302 9001
Fax: +1 512 302 4808