

DigitAll attraction

Samsung is proud to present the SyncMaster 403T, a new generation of monitors with a 40" expansive display screen.

The main attraction
in the Business Arena.



SyncMaster 403T

Samsung opens up a new generation of LCD monitors to present the world's first 40" large size display monitor. SyncMaster 403T is a high quality monitor that provides effective display capability wherever business information is required.

SAMSUNG



SyncMaster 403T



Wherever information needs to be delivered!

SyncMaster 403T is useful in any area where information needs to be delivered quickly and efficiently. Hotel lobbies, shopping malls, video conferencing rooms, airports.

Crisp Image with High Contrast

SyncMaster 403T has a higher contrast ratio of 600:1 than regular TVs and is capable of delivering a clear image in brightly lit settings.



General TV
(450:1)



SyncMaster 403T
(600:1)


Wide Viewing Angle and Anti-Glare Coating

SyncMaster 403T provides a 170° conic view paired with a response time of less than 23ms, so it is not prone to the blurring that appears on a regular monitor. Special anti-glare coating technology is applied to the screen surface, so the reflection is maximally diffused to ease your eye strain.

MDC (Multi Display Control)

Because the SyncMaster 403T has its RS-232C as a communication protocol, it allows you to easily control multiple displays at a distant location.

Dimensions

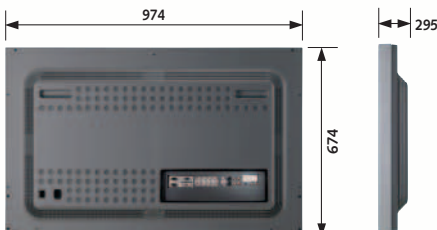

Specifications Summary

Panel	Type	a-si TFT / MVA
	Viewable Area	40"
	Pixel Pitch	0.681mm
	Brightness (Typ.)	450cd / m ²
	Contrast Ratio	600 : 1
	Viewing Angle (H/V)	170° / 170°
	Response Time	23ms
Frequency	Interface	Analog/Digital
	Horizontal Frequency	30-70kHz
	Vertical Frequency	50-85Hz
Bandwidth		100MHz
Maximum Resolution		1280 x 768
Color Supported		16.7 Mil.
Signal Input	Input Video Signal	Analog RGB, BNC, DVI Digital Link, CVBS, S-video, Component Video
	Video Level	Analog : 0.7V _{p-p} , Digital : TMDS™
	Sync. Type	Separate H/V
	Input Connectors	D-Sub, DVI-D, S-Video, BNC (Video), BNC (Vomponent x2)
Plug & Play	Signal Cable	DVI-D, D-Sub, RS232C Cable
	USB Powered hub Option	N/A
Power	DDC	DDC 2B
	On Mode	230 Watts (Max.)
DPMS Mode		<8 Watts
Multimedia Speakers		Optional external speaker (10wattsx2ch)
OSD-Digital Display Director™		O
Wall-Mount		Mounting Kit Available (Option)
Cabinet Color (front / back)		Silver / Black
Available Colors (optional)		Black
Other include accessories		Remote controller
Mac Compatibility		X
Dimension	Set (W x H x D) : with stand	974mm x 674mm x 295mm
	Packing (W x H x D)	1160mm x 830mm x 310mm
Weight	Net	26kg
	Gross	35kg
Regulations	Energy	Energy 2000 Complint, NUTEK
	Emissions	TCO'99, TCO'95
Special Features		S-video, PIP, PBP, RS232C, Support NTSC/PAL/SECAM, Wall mounting & Pivot
Warranty (P / L / Backlight)		3y / 3y / 20,000h
Stand		Standard Stand

* Design and specifications are subject to change without notice.



<http://www.samsung-monitor.com>

Distributed by: